

Zenn Rigid Click 30.


technical data.

BERRY  ALLOC


	Contains	m ²	Gross Weight (incl. box & pallet)
1 pack Zenn Rigid Click 30 planks	10 planks	2,17 m ²	18,53 kg
1 pallet Zenn Rigid Click 30 planks	45 packs	97,55 m ²	853,85 kg
1 pack Zenn Rigid Click 30 tiles	6 tiles	2,51 m ²	21,68 kg
1 pallet Zenn Rigid Click 30 tiles	40 packs	100,34 m ²	887,20 kg

Product specifications	Norm	Zenn Rigid Click 30 Planks	Zenn Rigid Click 30 Tiles
Dimensions	EN ISO 24342	L 1219,2 x W 177,8 mm	L 914,4 x W 457,2 mm
Wear layer	EN ISO 24340	0,30 mm	0,30 mm
Embossing		wood embossed	stone embossed
Total thickness	EN ISO 24346	5 mm (4 + 1)	5 mm (4 + 1)
Integrated underlay		yes (1 mm)	yes (1 mm)
Locking system			
Bevel type		micro V4	micro V4
Usage classification	EN ISO 16511	23/32	23/32
Residential/commercial warranty		For warranty conditions, visit our document centre at berryalloc.com	

Test results	Norm	Results
Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.berryalloc.com)
Castor chair	EN ISO 4918	pass
Fire resistance	EN 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	≤ 0,10 mm – pass
Thermal resistance	ISO 8302	0,025 m ² K/W
Slip resistance	DIN 51130	R10
	EN ISO 13893	class DS
Pendulum slip resistance (PTV)	EN 16165	36+
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	19 dB
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass
Lock strength	EN ISO 16511	> 1,5 kN/m – pass
Light fastness	EN ISO 105-B02	≥ 6 - pass
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)




vinyl planks & tiles.



Zenn Rigid Click 30. technical data.

BERRY  ALLOC

Composition

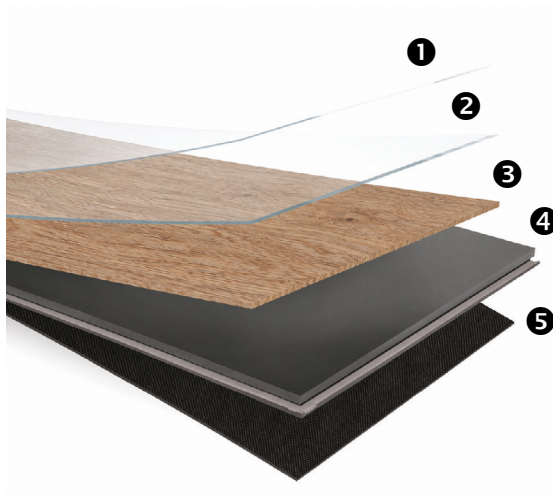

- ❶ Protective PU coating/lacquer
- ❷ Wear layer 0,30 mm
- ❸ Decor layer
- ❹ Rigid board with 2G locking system
- ❺ Integrated IXPE underlay 1 mm

vinyl planks & tiles.